


# Quick-Start-Guide TQMxE41S

x86 architecture

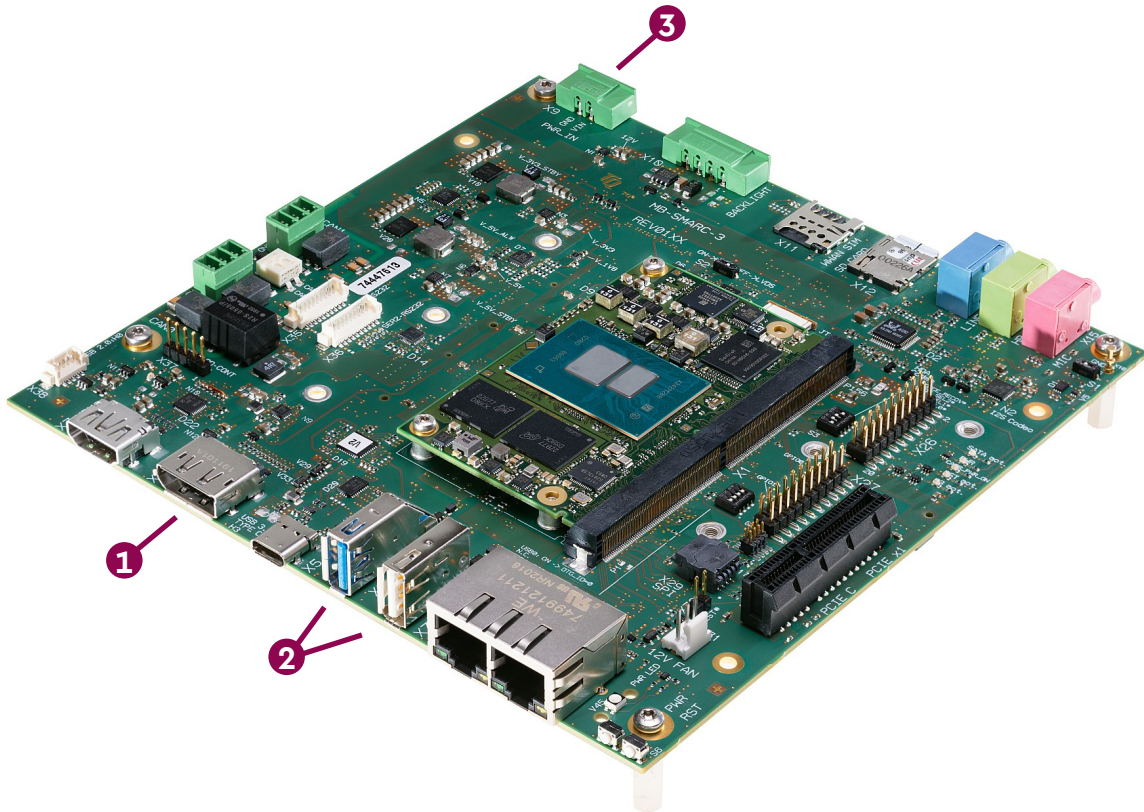

## 1 CONNECT EXTERNAL DISPLAY

Use DisplayPort connector X4 on the MB-SMARC-3 to connect an external display (e.g. monitor).

## 2 CONNECT KEYBOARD AND MOUSE

Connect a keyboard and mouse to any USB port available on Connector X6 or X7 so that you are able to navigate in the UEFI/BIOS menu or in the OS.

## 3 SUPPLY THE STKxE40S WITH POWER

Double-check the mains voltage required for the included power supply (100V...240V), then connect it to connector X9 on the MB-SMARC-3 using the included power adapter cable.

**Caution when using a different power supply!**  
**The Starterkit requires a regulated supply voltage of 12 V!**

## 4 ACCESSING THE UEFI/BIOS

In order to get into the UEFI/BIOS menu press "Esc" on the connected keyboard as soon as the "TQ" corporate logo appears.

## ! For latest documentation, Drivers, etc. please visit:

[tq-group.com/en/products/tq-embedded/x86-architecture/STKxE41S](https://tq-group.com/en/products/tq-embedded/x86-architecture/STKxE41S)  
[support.tq-group.com/tqmxe41s](https://support.tq-group.com/tqmxe41s)